


Remove hose from reel.


Caution!! Do not remove the two nuts on the side of the reel that has the caution decal!!




Caution!! Do not remove the two nuts on the side of the reel that has the caution decal!!

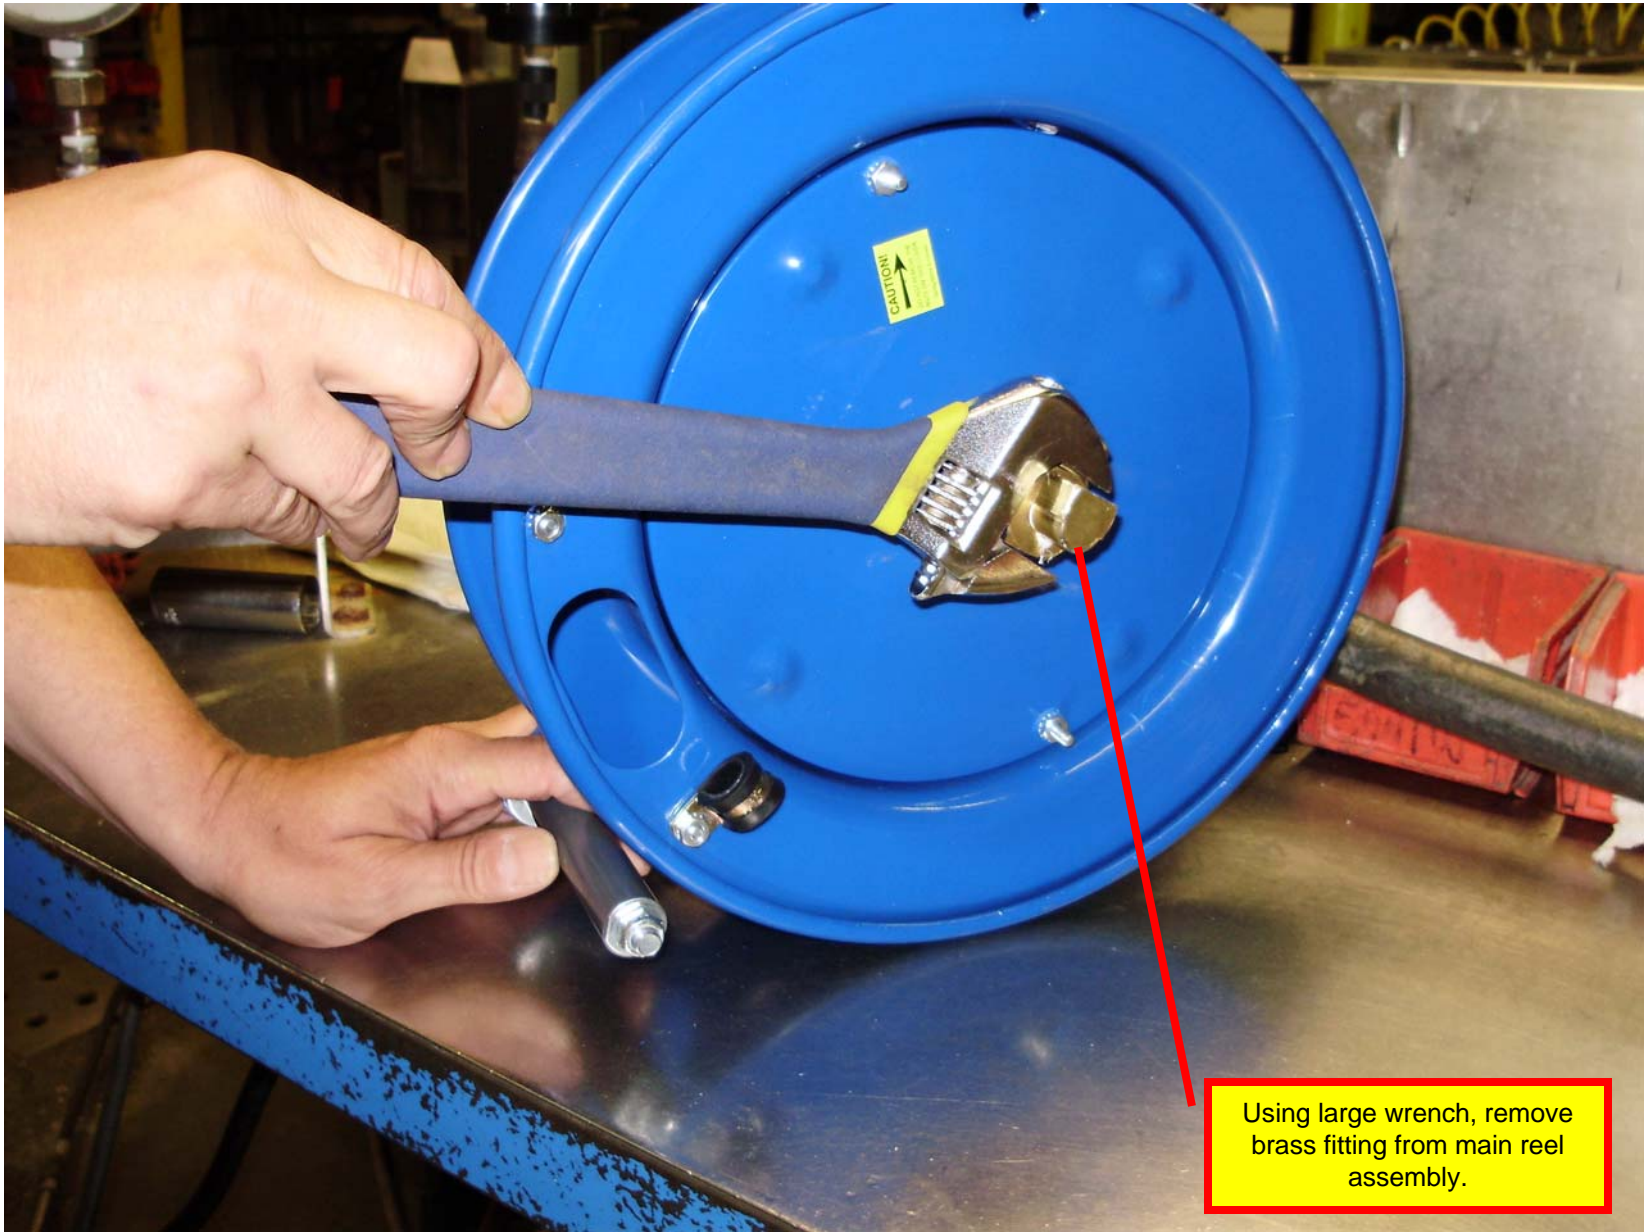

Using large wrench, remove brass fitting from main reel assembly.

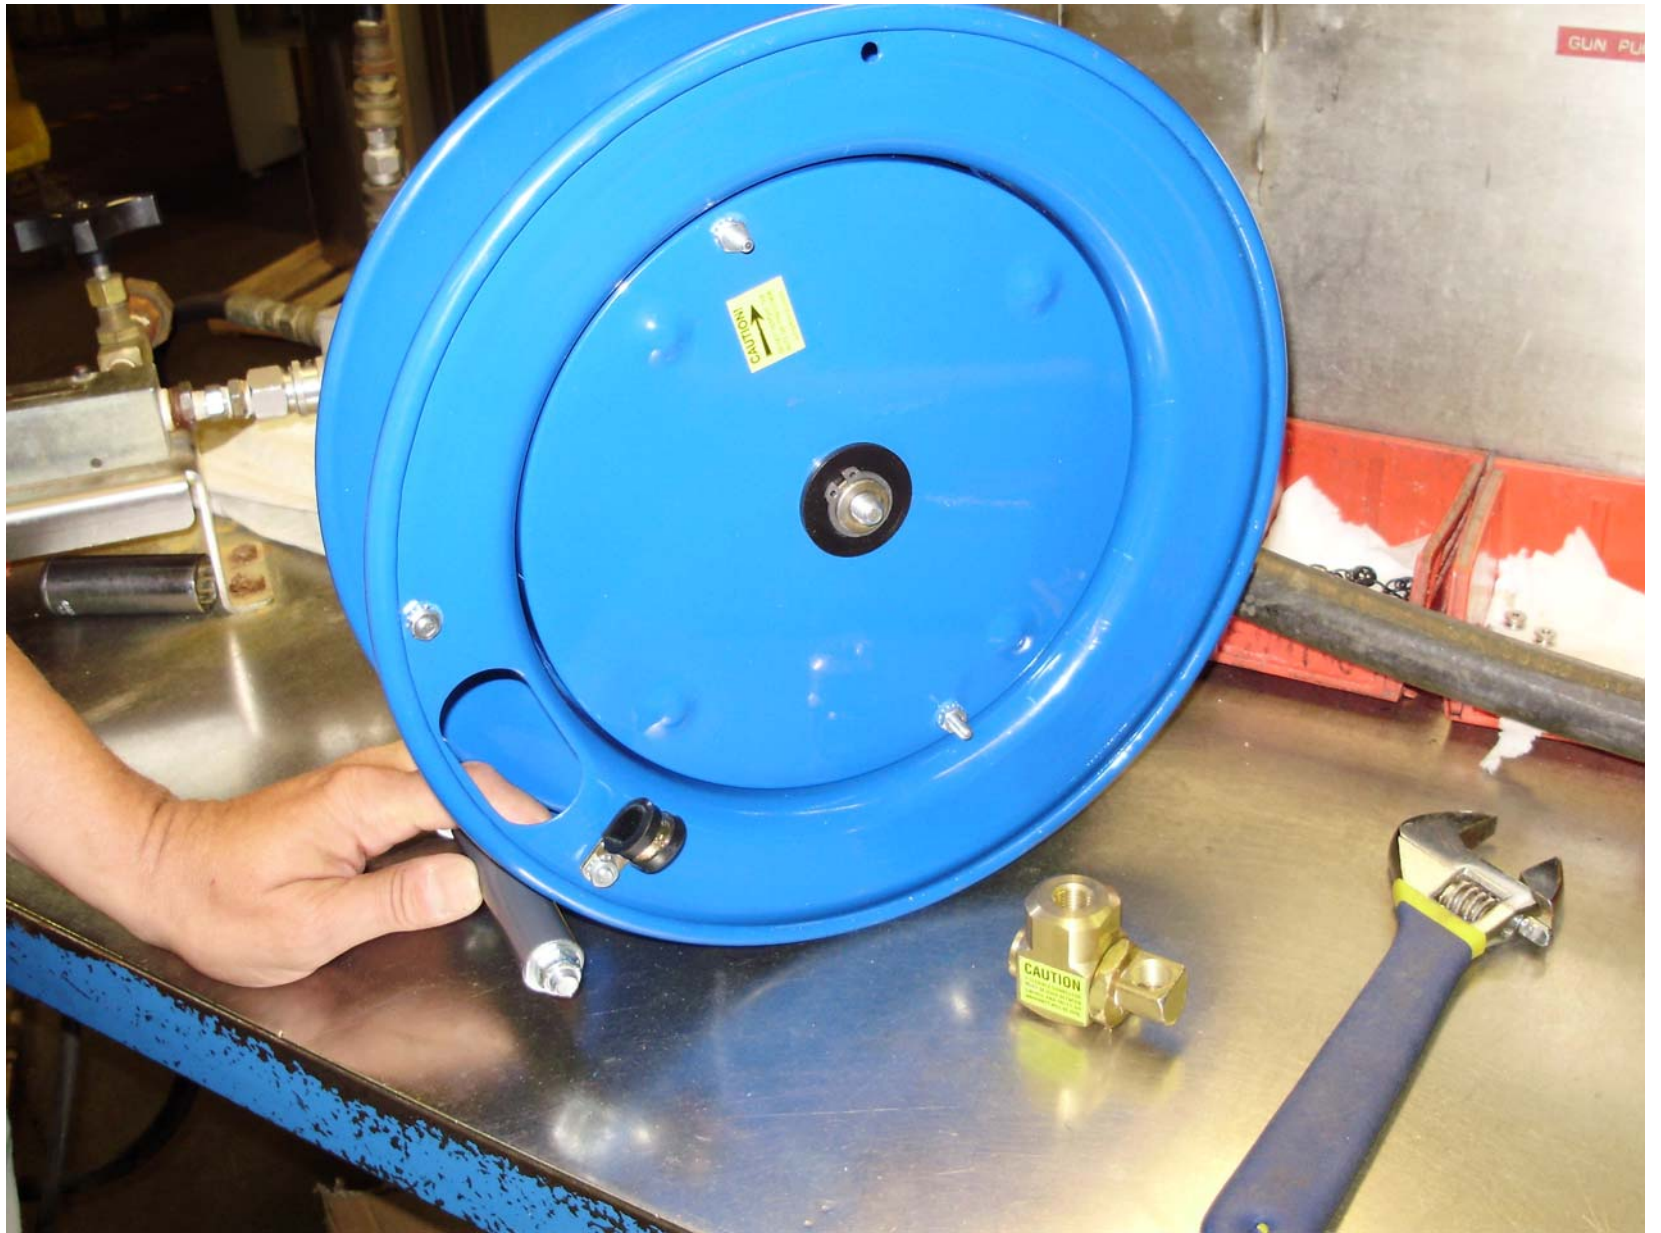

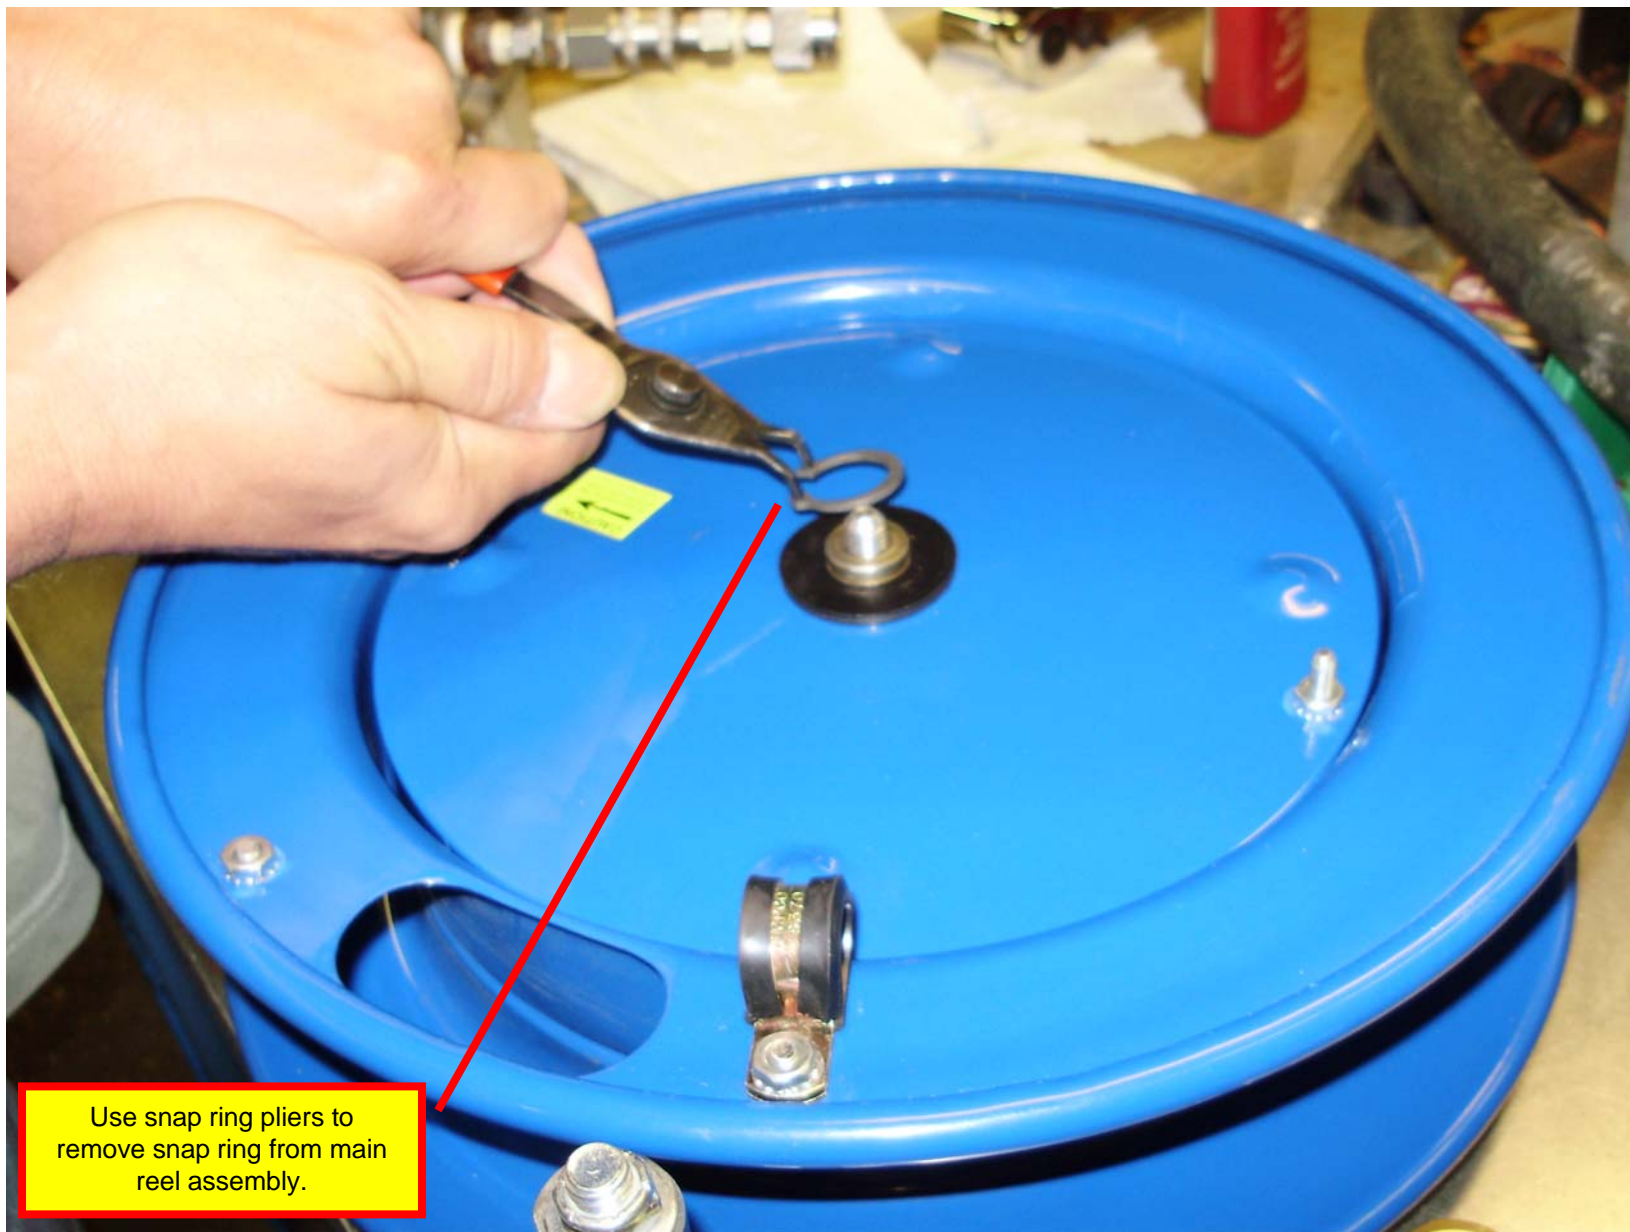

Use snap ring pliers to remove snap ring from main reel assembly.




Remove washer from main reel assembly.




From opposite side of reel,
remove nuts from studs.

**Make sure you are not
removing the nuts from
the CAUTION side of the
reel!**

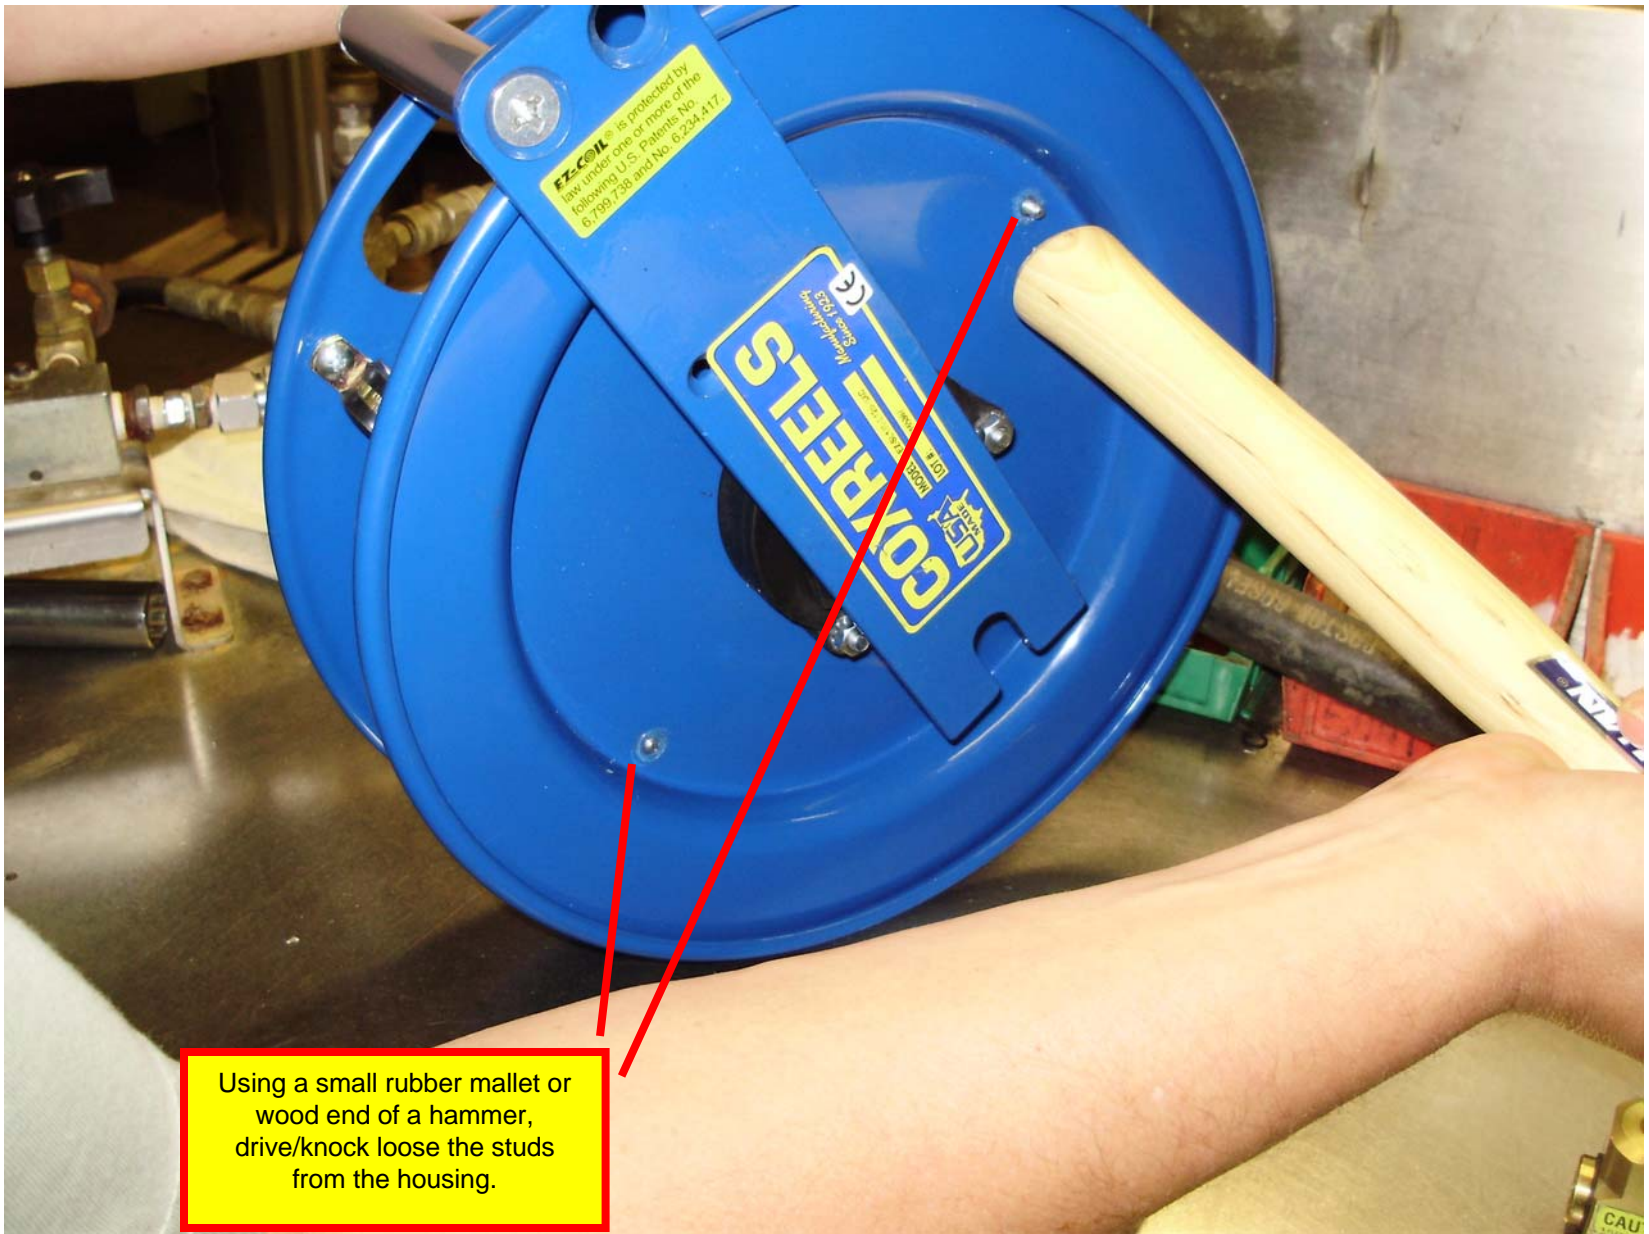

Using a small rubber mallet or wood end of a hammer, drive/knock loose the studs from the housing.

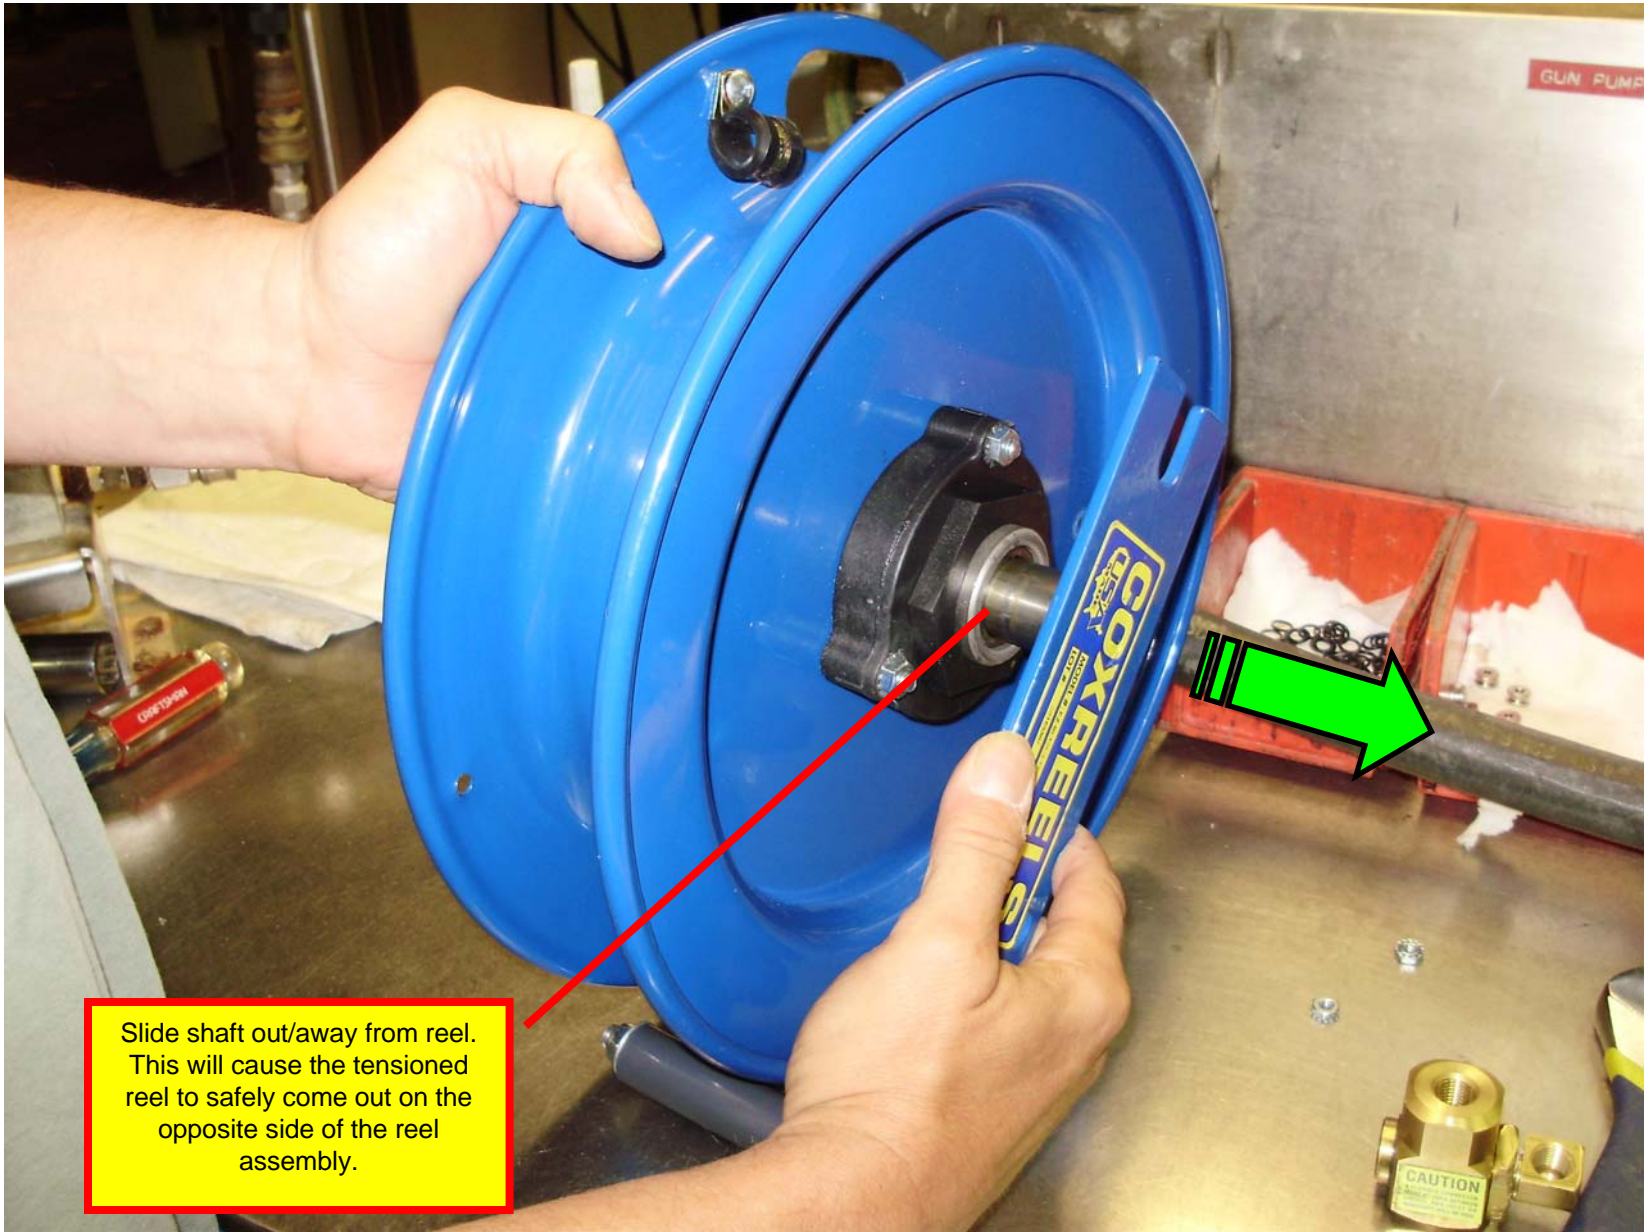

Slide shaft out/away from reel.
This will cause the tensioned
reel to safely come out on the
opposite side of the reel
assembly.



Reel is now apart!

Reinstall in reverse order.
Make sure yellow caution decal
is facing up when reinstalling.