
S260

Dual 30hp Side Surface Drying System







Features & Benefits

- Adjustable Bag Angle
- (1) 30 Horse Power Per Side
- Touch Free Drying
- High Vehicle Count Per Hour
- Low Maintenance

Motor Specifications

- (2) 30hp, 3600 RPM's
- 208-230 / 460 volts
- 1.15 service factor
- Frame: 286TS
- 3 Phase
- (TEFC) Totally enclosed, fan-cooled

NOTE: Wiring and controls to be provided by the purchaser: Additional motor specifications available upon request. Additional voltages available on special order. The Proto-Vest S260 dryer is ideal for tunnels, rollovers and self-service operations. This dryer is usually packaged as a combination unit that can be used in conjunction with any additional Proto-Vest dryers.

Equipment Options



- Silencer Package -
- Reduce decibel levels generated by the dryer to ensure a pleasant wash environment
- Stainless Blower Package
- All stainless steel blower assembly
- Motor starter options available:
- Contractor
- Soft start
- VFD

Your Choice in Air Bag Color


Proto-Vest dryer bags come standard black. Red, Green, and Blue available while supplies last.




The Ultimate In Drying Technology





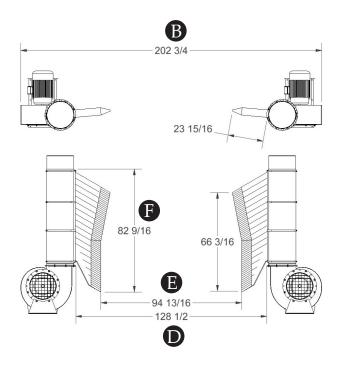



Equipment Dimensions

- OVERALL LENGTH
 39 7.8 in.
- **B OVERALL WIDTH** 202 3/4 in.
- OVERALL HEIGHT
 106 3/16 in.
- OVERALL OPENING 128 1/2 in.
- **BAG OPENING** 94 13/16 in.
- BAG HEIGHT 82 9/16 in.

Weight: 600 lbs. (approximate)

Decibel Readings

With Silencer / Without Silencer (WS) (WOS)

S260 - (2) 30hp dryer:

WS: 10 ft=74.5 dBa; WOS: 10 ft=82.9 dBa WS: 20 ft=68.5 dBa; WOS: 20 ft=76.9 dBa WS: 30 ft=64.9 dBa; WOS: 30 ft=73.4 dBa WS: 40 ft=62.4 dBa; WOS: 40 ft=70.9 dBa WS: 50 ft=60.5 dBa; WOS: 50 ft=69 dBa (The above decibel readings are interpolated.)

General Description

The Proto-Vest S260 is designed as both a stand alone and modular drying system that is ideal for tunnels, rollovers and self-service operations. This dryer is usually packaged as a combination unit that can be used in conjunction with any of the product lines. When packaged as a modular system, the S260 assist in providing an additional 60-hp of drying capability to any carwash application. This patented system utilizes two 30-hp blowers one on each side, a plenum and two 67" Proto-Duck™ side bag to direct air across the vehicle as it passes by the equipment.

Proto-Vest's stringent standards in material selection for our dryers results in extended equipment life and reduced maintenance. The S260's blower assembly is manufactured from powder coated steel. Its plenum is made from 5052-H32 aluminum and its bag is produced from durable Proto-Duck™ material to resist corrosion and tearing.

(Please note that J.E. Adams recommends routine maintenance in order to maximize product life.)

Service / Support

Proto-Vest recognizes that support after the sale of equipment is critical to the success of our customers. Our company offers its customers access to a wide range of services including: factory direct aftermarket parts and an engineering staff for custom designed applications.

To contact customer support call us toll free at **800.553.8861** or go to **www.jeadams.com**.

Proto-Vest Patents:

U.S.: 3,942,430; 4,161,801; 4,409,035; 4,418,442; 4,433,450; 4,445,251; 4,446,592; 4,589,160; 4,700,426; 5,027,714; 5,184,369; 5,187,881; 5,195,207; 5,280,665; 5,421,102; 5,553,346; 5,886,648; 5,901,461; 5,950,324; 5,960,564; 6,038,781; 6,176,024; 6,519,872; others pending. Canada: 1,021,996; 1,111,328; 1,190,453; 1,201,040; 1,197,439; 1,219,195; 1,219,192; 1,219,194; 1,258,026; 1,219,193; 2,071,586; 2,071,239; 2,071,388; others pending.

*Specifications subject to change without notice.

***If starting motor over 10-12 times an hour it may be more
efficient to leave blower on.



1025 63rd Ave SW, Cedar Rapids, IA 52404 800-553-8861 • 319-363-0237 • Fax 319-363-8120 www.jeadams.com